



\*Overseas model shown

**WEIGHT RATINGS**

GVM: 25,000 kg  
 GCM: 75,000 kg

**ENGINE**

Power: 417kW (560 hp) @ 1600rpm  
 Torque: 2600Nm @ 1000 - 1400rpm

**TRANSMISSION**

ZF TraXon 12 Speed Automated Manual Transmission + Intarder

**SAFETY FEATURES**

Anti-Lock Braking System	(ABS)	●
Electronic Stability Program	(ESP)	●
Lane Departure Warning System	(LDWS)	●
Anti-Slip Regulator	(ASR)	●
Hill-Start Assist	(HSA)	●
Electronic Brake System	(EBS)	●
Autonomous Emergency Braking	(AEB)	●
Forward Collision Warning	(FCW)	●
Daytime Running Lights	(DRL)	●


**SAFETY FEATURES**

ECE-R29 Cab Strength Compliant		●
Doors Unlocked Warning		●
Drivers Seatbelt Warning		●
Front and Rear Fog Lamps		●
Dusk Sensing Head Lights		●
Height Adjustable Head Lights		●
Reverse Camera & Buzzer		●
Cab Tilt Warning	(CTW)	●
Audible Parkbrake Alarm	(PBA)	○

● = Standard Feature | ○ = Optional Feature

ENGINE	
Model	CUMMINS X13 EVID 560
Type	Diesel 6-cylinder in-line with turbo-intercooler
Displacement	12,900 cc
Bore x Stroke	132mm x 157mm
Compression Ratio	18.4 : 1

PERFORMANCE	
Max. Power	417kW (560hp) @ 1600rpm
Max. Torque	2600Nm @ 1000-1400rpm
Max. Speed <sup>3</sup>	110km (full load)
Gradability <sup>3</sup>	≥ 25%
Fuel Injection	Electronic High-Pressure Common Rail Direct
Emission Standard	Euro 6e
Emission Control	SCR+DPF

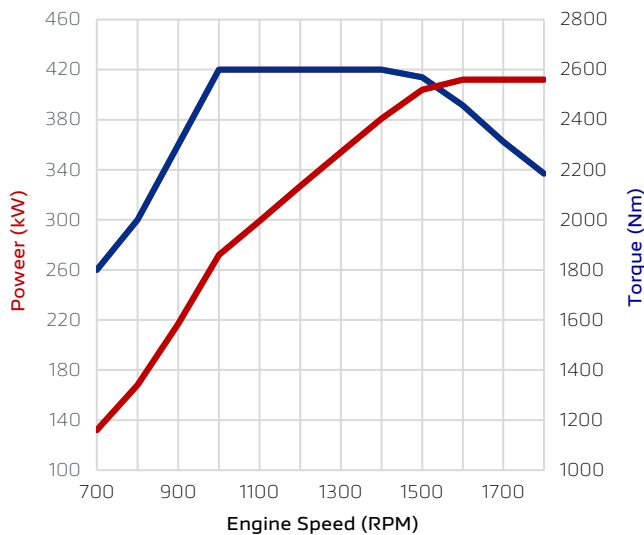**Foton Cummins X13EVID560**


TRANSMISSION		
Model	ZF TraXon 12TX2621TD (+ Intarder)	
Number of Gears	12	
Forward Gear Ratios	(1):	16.69
	(2):	12.92
	(3):	9.93
	(4):	7.67
	(5):	5.90
	(6):	4.57
Reverse Gear Ratios	(7):	3.66
	(8):	2.83
	(9):	2.17
	(10):	1.68
	(11):	1.29
	(12):	1.00
Reverse Gear Ratios	(1):	15.54
	(2):	12.03
	(3):	3.40
	(4):	2.64
PTO Provision	TBC	
Driving Modes	Economy	Power

CLUTCH	
Type	Dry Single Plate, Diaphragm Spring Clutch
Actuation	Air Boost
Diameter	430mm

STEERING	
Type	Closed Recirculating Ball
Power Assist Type	Hydraulic Boost
Turning Radius	7.59m

SUSPENSION	
Front	Type: Multi Leaf Spring (3) + Stabiliser Bar
	Shocks: Equipped (Double Acting)
Rear	Type: Air Bag (8) with ECAS + Stabiliser Bars
	Shocks: Equipped (Double Acting)

BRAKES	
Front	Type: Ventilated Disc
	Diameter: 430mm
Rear	Type: Ventilated Disc
	Diameter: 430mm
Model	WABCO/Knorr-Bremse
System	Dual Circuit Air Brake
Air Tanks	Aluminium Alloy
Park Brake	Air Activated (Rear)
Features	ABS, ESP, ASR, HAS, EBS, AEB <input checked="" type="radio"/>
	Parkbrake Alarm <input type="radio"/>
Auxiliary	Exhaust Brake
	Transmission Intarder

AXLES	
Front	Type: Forged & Stamped I-Beam
	Max: 7,500kg <sup>1</sup>
Rear	Type: Banjo (Stamped & Welded Housing)
	Max: 26,000kg <sup>1</sup>
	Ratio: 3.083 : 1
Inter-Axle Diff Locks	Equipped

ELECTRICAL	
System Voltage	24V
Alternator Capacity	TBC
Battery Capacity	2 x 180Ah Maintenance Free Batteries
Starter Motor	24V / 8.5kW output

● = Standard Feature | ○ = Optional Feature

WHEELS & TYRES	
Type	Aluminium Alloy (polished)
Front	<b>Tyres:</b> 275/70R22.5 18PR
	<b>Load Index:</b> 148/145
	<b>Max Tyre Rating:</b> 6,300kg <sup>1</sup>
	<b>Rim Size:</b> 22.5" x 8.99"
	<b>Rim Offset:</b> 175 ± 1mm
	<b>PCD:</b> 335mm
Rear	<b>Tyres:</b> 275/70R22.5 18PR
	<b>Load Index:</b> 148/145
	<b>Max Tyre Rating:</b> 23,200kg <sup>1</sup>
	<b>Rim Size:</b> 22.5" x 8.99"
	<b>Rim Offset:</b> 175 ± 1mm
Number of Studs	10

FUEL & ADBLUE® TANK	
Fuel Tank Capacity	720L Combined (420+300) with Locking Cap
Fuel Tank Material	Aluminium Alloy
AdBlue® Capacity	105L with Locking Cap

EXTERIOR FEATURES	
Cab	4-Point Air Suspended High Roof Sleeper Cab
	ECE-R29 Cab Strength Compliant
	Forward Control Hydraulic Tilt Function
Storage	2 x LHS External Storage Lockers
	1 x RHS External Storage Locker
Lighting	Auto Sensing, Height Adjustable, Integrated Halogen Headlights
	LED Daytime Running Lights (DRL)
	Front and Rear Fog Lamps
	LED Roof Clearance Lights
	LED Side Marker Lights
	LED Cornering Light (LHS)
	LED Tail Light Combination
Mirrors	6 x Exterior Mirrors – incl. Side View, Front View, Wide Angle and Close Proximity
	Heated & Power Adjustable (2 main mirrors only)
Other	Hyva 5th Wheel (1246mm theoretical height)
	2-Speed Variable Intermittent Wipers
	Exterior Windscreen Sunvisor
	Adjustable Air Deflector
	Satin-Finish Silver Grill with Front Opening Mask

CAB INTERIOR	
Steering Wheel	2-Way Power Adjustable (Telescopic & Tilt)
	Audio & Bluetooth® controls
Seating	2 x Seating Capacity
	Air Sprung, 9-way Adjustable Drivers Seat
Sleeping	2 x Sleeping Capacity
	1 x Fixed Lower Bunk <b>Size:</b> 2310 x 600
	1 x Foldout Upper Bunk <b>Size:</b> 2000 x 625
Infotainment	LCD Touch Screen
	AM/FM Radio
	Reverse Camera
	Cruise Control
	Bluetooth® (Handsfree)
	USB Port & SD Card Slot
Storage	1 x Underbunk Fridge <b>Vol:</b> 11L
	3 x Overhead Lockers
	3 x Overhead Shelves
	2 x Overhead Pockets
	2 x Door Pockets
	1 x Underbunk Drawer
Other	Climate-Control HVAC System
	Remote Central Locking
	Power Windows
	Power Roof Hatch with Sun Blind
	2 x Cup Holders
	2 x Power Outlets (24V/15A)
	4 x Entry Assist Grab Handles
	2 x Door Courtesy Lights
Dual-mode Horn (Electric & Air)	

CHASSIS FRAME	
Chassis Type	Longitudinal Beam High Strength Steel
Pre-Drilled	Equipped
Dimensions	286/285mm x 80mm x 8mm
Tensile Strength	610 MPa

VEHICLE MASSES		
GVM <sup>1</sup>	25,000kg	
GCM <sup>1</sup>	75,000kg	
Tare Weight <sup>2</sup>	9,090kg	
Axle Tare Weights <sup>1</sup>	<b>Front:</b> 5,240kg	<b>Rear:</b> 3,850kg

● = Standard Feature | ○ = Optional Feature


DIMENSIONS		
Wheelbase	(WB):	3,975mm
Overall Length	(OAL):	7,115mm
Overall Width	(OAW):	2,550mm
Overall Height	(OAH):	4,000mm
Interaxle Space 1	(IAS-1):	3,300mm
Interaxle Space 2	(IAS-2):	1,350mm
Internal Cab Height	(ICH):	1,910mm
Internal Cab Width	(ICW):	2,150mm
Front Overhang	(FOH):	1,460mm
Rear Overhang	(ROH):	1,005mm
Rear Chassis Height	(RCH):	1,120mm
Rear Chassis Width	(RCW):	850mm
Front Wheel Track	(FWT):	2,080mm
Rear Wheel Track	(RWT):	1,880mm
Cab to Floor Height	(CFH):	3,480mm
Cab to Chassis End	(CCE):	4,640mm

WARRANTY & SERVICE <sup>4</sup>		
Standard Warranty	3 Years / 300,000kms (whichever occurs sooner)	●
Extended Warranty	2 Years / 200,000kms (whichever occurs sooner)	○

OPTIONS & ACCESSORIES			
Stoneguard	○	Moulded Mat Set	○
Monsoons	○	Parkbrake Alarm	○
Seat Covers	○	Metallic Paint	○
Extended Warranty Cover - 2 Years / 200,000kms <sup>4</sup>			○

MODEL DETAILS	
Model Variant	Auman R Tractor
Model Code	BJ4269

● = Standard Feature | ○ = Optional Feature

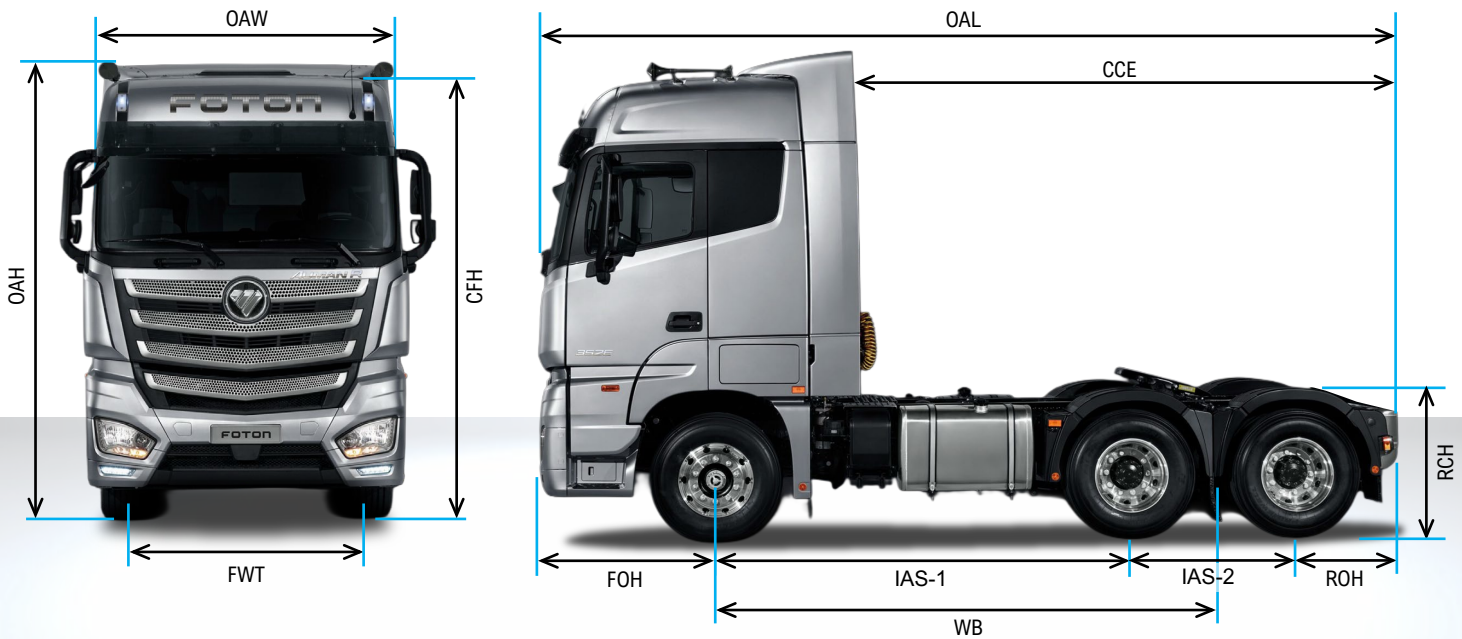

- Vehicle ratings and axle weight limits are subject to government regulatory requirements and weight distribution analysis. See your local Foton Truck Dealer to select the correct vehicle for your specific application.
- All weights and payload calculations are subject to 3% variation (+/-).
- Maximum speed & gradability calculations are theoretical only. Actual performance may vary depending on conditions.
- Total 5 Year Warranty Cover, including Standard Warranty (36 months / 300,000km) & Extended Warranty (24 months / 200,000km), is 60 months or 500,000kms, whichever occurs first. To qualify for the Extended Warranty, all scheduled servicing during the total 5 Year Warranty Cover period must be performed by an authorised Foton Service Dealer from the date of delivery to the first customer. If scheduled servicing is performed by an unauthorised agent, then only the Standard Warranty Cover will apply.

Foton Trucks are distributed in New Zealand by Foton Truck NZ (Anglesea Vehicle Distributors Ltd). All effort has been made to ensure the information contained in this brochure was correct at time of printing. Foton Truck NZ reserves the right to alter any details of the specifications & equipment without notice. Foton Truck NZ, in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Foton Truck Dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features & options are available for the vehicle you are ordering.